

Sunfix Plus Racking Configurator

Project Information

Dave Strenski

stren@cray.com

734-000-0000

Address: 206 Oak

Ypsilanti,

MI 48197, USA

Project Description:

Garage

System Criteria

Total # of PV Modules

Total # of PV Modules

PV Module Rated Power

Module Frame Color

Module Orientation

Varying Modules per Row

of Rows (East/West)

• Ref. # of Modules per Row

Type of Roof Covering

Quick Mount PV Roof

Flashing

Roof Pitch

Snow Load (psf)

Wind Speed

Zone

14

Sunmodule Plus

240 Watts

Silver

Portrait

False

2 Rows (East/West)

Composition

Composition - Mill

27-45 Degrees

40 psf

90 mph

Exposure В

Options

Rafter Spacing

48"

Max Span

51" No

Add Micro-Inverter

Mounting Pricing

Height Extensions for

None"

No

None

0% & 0%

Quick Mounts (in)

Spare Hanger Bolts for

Quick Mounts

WEEB Grounding for

Rails

Discount in Percentage

(MISC & SUNFIX)

Bill of Materials

Sr. #	/	Item # EC0591	Description RAIL SFP2	Units PCS	Weight/ea. (LBS 6.720)Unit Price \$29.03	Qty 4	Total Price \$116.12
2	/	EC0592	3099MM 122" RAIL SFP2 4115MM 162"	PCS	8.924	\$38.56	4	\$154.24
3	-	EC0421	SPLICE CONN SFP2 RAIL CLR ANO		0.335	\$4.25	4	\$17.00
4		EC0427	L-BRACKET SFP2	PCS	0.146	\$2.50	24	\$60.00
5	(9)	EC0496	NUT HEX M8 SERR FLG A2 SST	PCS	0.004	\$0.31	24	\$7.44
6	4	SH0001	T-HEAD BOLT M8x20 A2	PCS	0.031	\$0.46	24	\$11.04
7	3ª	SA0192	TOP CLAMP ASSY M8 31MM	PCS	0.088	\$2.09	32	\$66.88
8	3	EC0602	EQUIP GND LUG 8.0 KIT W/T-BLT	PCS	0.099	\$9.30	4	\$37.20
9	1	EC0603	RAIL SPLICE GROUND 8.0KIT W/ T-BLT	PCS T	0.119	\$13.73	4	\$54.92
10	de.	EC0595	WIRE CLIP #10AWG 50 PACK	PACK	0.099	\$22.40	1	\$22.40
11		EC0604	HEX BIT TORX T40 2"LG	PCS	0.011	\$2.21	1	\$2.21
12	6 6	EC1154	QM COMP E- MOUNT 9"x12"	PCS	0.830	\$15.50	24	\$372.00
13	6	SA0215	SF END SPACER 31MM	PCS	0.071	\$0.52	8	\$4.16
14	March 1	EC0526	CABLE TIE 13"UV RES BLK 50PK	PACK	0.150	\$45.00	1	\$45.00
						C., b. 4-4	allist Daisse	COZO C4


Sub-total List Price: \$970.61

Discount: \$0.00

Discounted Price: \$970.61

Solar Panel Image

of modules per row

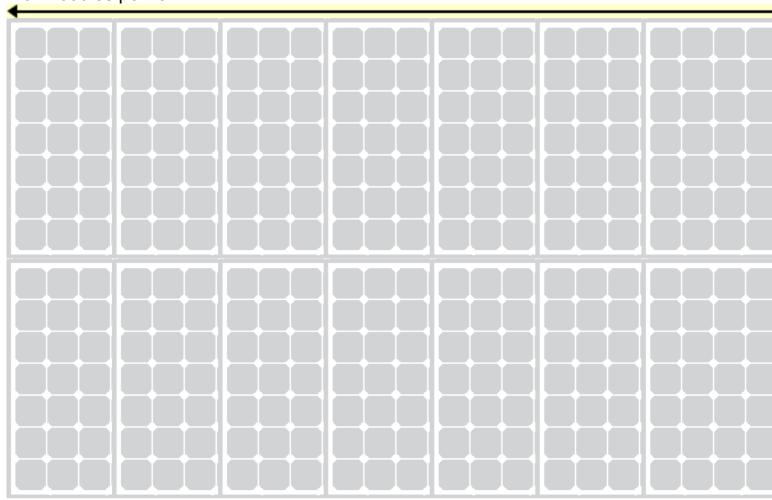

Power Generation Details

\$/Watt: \$0.29 Watt/ft: 13.09 Array Power (kW): 3.36

Spans

Max Span (in): 51

Max Cantilever (in): 27

Rafter Spacing (in): 48

Max Span w/Rafter Spacing 48

(in):

Loads

Array Length (ft): 23.18 Array Width (ft): 11.07 Array Area (ft): 256.68 Weight of mounting (lbs): 92.70 Weight of mounting and 746.50 modules (lbs): Weight of mounting per Array 0.36 Area (lbs/ft2): Weight of mounting and 2.91 modules per Array Area (lbs/ft²):

Notes

Contact SolarWorld Customer Service if you have any questions regarding the products, pricing, or discounts for your organization.

customerservice@solarworldusa.com (805) 388-6590

If you need assistance with designing a system, contact SolarWorld Design Services. designservice@solarworldusa.com

Disclaimer -This design and associated bill of materials is to be evaluated to the Sunfix Plus Pitched Roof Mounting System Planning and Installation Guide which references International Building Code 2006 and 2009, American Society of Civil Engineers 705, California Building Code 2010, and the Uniform Building Code. The installation of products related to this design is subject to requirements in the above mentioned installation manual.

©SolarWorld AG. This website is powered 100 percent by clean, renewable energy.