

*Grid-Tied PV Inverters*

**PVI 3000 PVI 4000**  
**PVI 5000 PVI 5300**

*a breakthrough in efficiency and quality*



- *top CEC efficiency*
- *DC disconnect*
- *string combiner*
- *quick-mount bracket*
- *lightweight*
- *10 year warranty*
- *powerful LCD display*
- *latest UL1741/IEEE1547*
- *universal 240/208VAC*
- *positive ground option*
- *transformer isolation*
- *free PC software and RS232&485 parts*
- *detachable DC wiring box*



Solectria introduces the PVI 3000/4000/5000/5300 inverter: exceptional quality and efficiency with more standard features.



# INVERTER SPECIFICATIONS

	PVI 3000	PVI 4000	PVI 5000	PVI 5300
--	----------	----------	----------	----------

## Input

Continuous Power @240 VAC @208 VAC	3050W 2840W	4100W 3580W	5150W 4520W	5575W 4840W
Recommended Max. PV Array Power, STC Rating @208 VAC	3600W 3400W	4900W 4300W	6200W 5400W	6700W 5800W
MPPT Voltage Range	200V-550 VDC	200V-550 VDC	200V-550 VDC	200V-550 VDC
Maximum Input Voltage	600 VDC	600 VDC	600 VDC	600 VDC
Strike Voltage	235 VDC	235 VDC	235 VDC	235 VDC
Maximum Input Current	16 A	20 A	25 A	25 A
Maximum Short Circuit Current	24 A	24 A	30 A	30 A
Fused Inputs	3	4	4	4

## Output



Continuous Power @240 VAC @208 VAC	2900W 2700W	3900W 3400W	4900W 4300W	5300W 4600W
Voltage Range @240 VAC @208 VAC	212-264 VAC 184-228 VAC	212-264 VAC 184-228 VAC	212-264 VAC 184-228 VAC	212-264 VAC 184-228 VAC
Frequency	60Hz Range: 59.3-60.5Hz	60Hz Range: 59.3-60.5Hz	60Hz Range: 59.3-60.5Hz	60Hz Range: 59.3-60.5Hz
Continuous Current	13 A	16.3 A	20.7 A	22.1 A
Output Current Protection Required	20 A	25 A	30 A	30 A
Max. Backfeed Current	0 A	0 A	0 A	0 A
Power Factor	Utility, >99%	Utility, >99%	Utility, >99%	Utility, >99%
THD	<3%	<3%	<3%	<3%
Efficiency Peak @240 VAC @208 VAC	96.7 96.4	96.7 96.5	96.7 96.4	96.6 96.3
CEC Efficiency @240 VAC @208 VAC	96.0 95.5	96.0 95.5	96.0 96.0	96.0 95.5

## General

Enclosure	Rainproof, NEMA 3R			
Housing Material	Painted aluminum			
Ambient Temperature Range	-25°C to +55°C			
Cooling	Convection		Convection and fan assist	
Weight	47 lb (21.4 kg)	48 lb (21.8 kg)	58.5 lb (26.6 kg)	60 lb (27.4 kg)
Size (L x W x H)	29.75 in x 17.75 in x 6.75 in (741mm x 454mm x 175mm)		29.75 in x 17.75 in x 8.27 in (741mm x 454mm x 210mm)	
Wire Sizes	12 to 6 AWG input and output connections			
Standards	UL1741/IEEE1547, IEEE1547.1, ANSI62.41.2, FCC part 15 B			
Warranty	10 years standard			

## INDUSTRY LEADING FEATURES

- Highest efficiency transformer isolated inverters in the industry, 96% CEC, full line!
- Fully integrated with DC disconnect, 3 or 4 fuse combiner and detachable DC wiring box.
- Widest DC voltage range, 200-600 VDC.
- Easy installation with low weight (47-60 lb) with quick-mount bracket feature, and universal 240/208 VAC operation.
- High reliability, 10 year warranty and certification to latest UL1741/IEEE1547.
- Free PC software and both RS232&485 communication ports.
- SolrenView or Fat Spaniel Inverter-Direct Internet, and/or revenue-grade monitoring options available. Also compatible with Energy Recommerce, Draker and others.
- Optional integrated panel assemblies with kWh meter and/or AC disconnect.

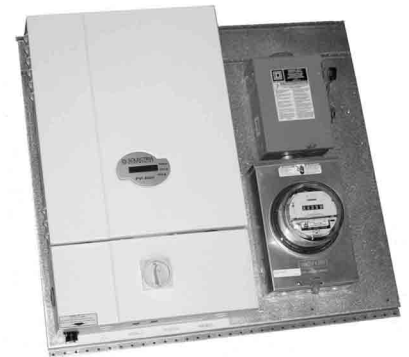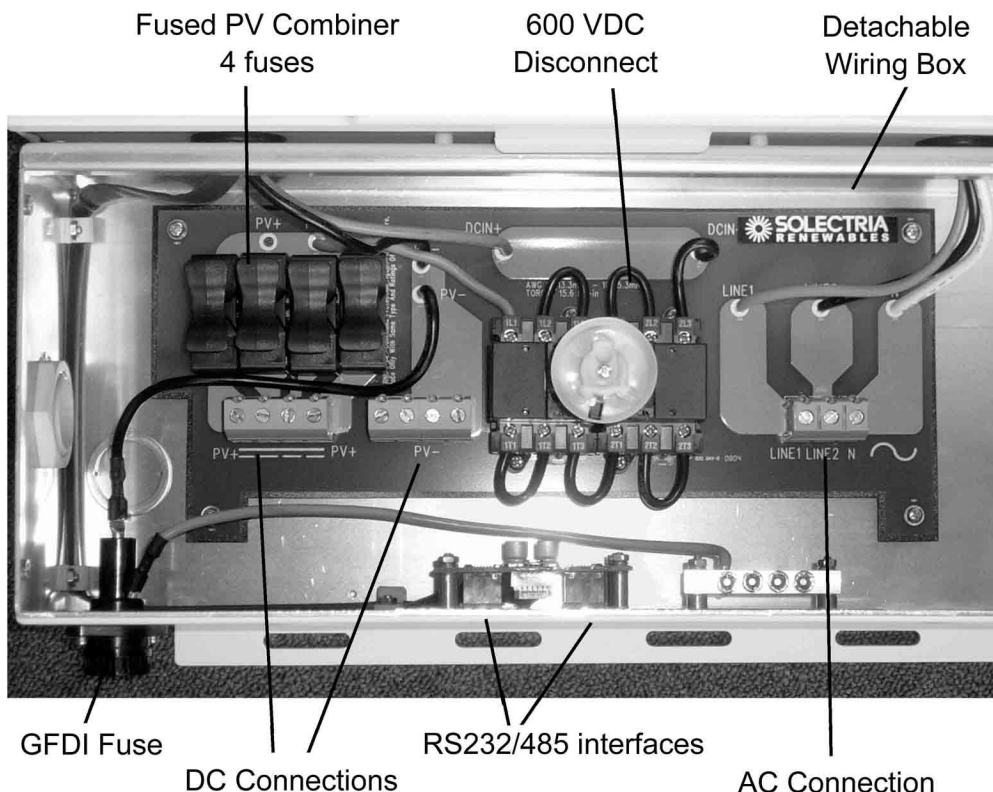

**SOLECTRIA RENEWABLES**

**DC Power Systems**

(800) 967-6917

[www.dcpower-systems.com](http://www.dcpower-systems.com)

[www.solren.com](http://www.solren.com)